

Decorative Wall Cladding and Panelling




DecoClad

DecoClad is part of Plaslyne, the market-leading
plastic building products specialist.


DecoClad

Decorative cladding and wall panelling is the modern and stylish alternative to ceramic tiles, timber, planking and wallpapers.

Available in a range of colours, finishes, textures and sizes, there is a **DecoClad** wall panel to suit all rooms in the house, hotel or office.

Whether installed into new-build, refurbishment, domestic, catering or office applications, **DecoClad** wall panelling is cost effective, easy to fit, easy to maintain, and hardwearing.

Add to that the benefits of better insulation, reduced condensation and wipe-clean properties and the argument for **DecoClad** wall panelling becomes even stronger.

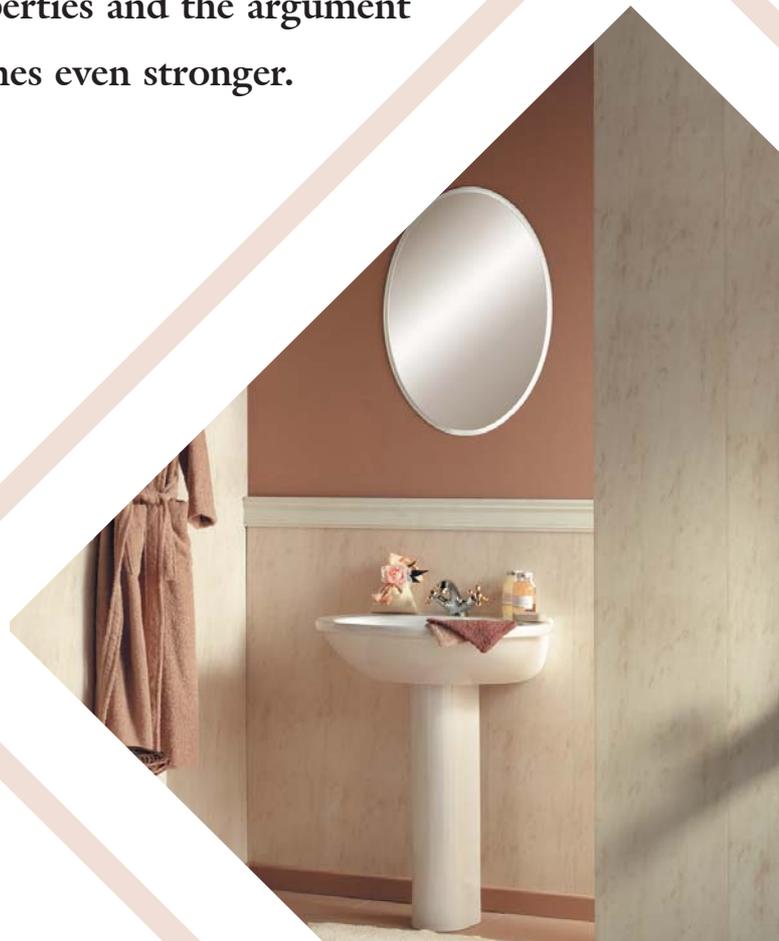

The DecoClad Range

Orion



P/DC/O/BM
Byzantium



P/DC/O/PO
Pompei



P/DC/O/AE
Amarante



P/DC/O/CA
Carrara



P/DC/O/LU
Lugano


Mosaic



P/DC/M/SD
Sand



P/DC/M/GY
Grey



P/DC/M/AZ
Azur LM




P/DC/M/JD
Jade



P/DC/M/RO
Rose

Tinto



P/DC/T/GL
Glacier



P/DC/T/DT
Desert



P/DC/T/AM
Amazonia



P/DC/T/SH
Sahara



P/DC/T/SY
Strawberry



P/DC/T/SB
Sky Blue



P/DC/T/SA
Savannah

Patina



P/DC/P/GY
Grey



P/DC/P/JD
Jade



P/DC/P/LA
Lavender



P/DC/P/OC
Ocre



P/DC/P/TE
Terra



P/DC/P/SD
Sand

Marble Effects



P/DC/IN/250
Italian Marble



P/DC/GY/250
Grey Marble



P/DC/EL/250
Eggshell



P/DC/FE/250
Florence



P/DC/IP/250
Italian Marble Pink



P/DC/IB/250
Italian Marble Blue



P/DC/GN/250
Green Marble



P/DC/IG/250
Italian Marble Green

All Marble effects also available in white
P/DC/WH/250





Fitting Instruction

DecoClad panels are easily fixed to almost every surface. Depending on the type of wall or ceiling you can choose different types of fitting.

Nailing: apply nails evenly and level in the panel lip. Be careful not to hit the panel with the hammer. This method only applies when fixing cladding to a wooden surface or battening.

Stapling: use stainless staples when fixing to plaster. This method is most recommended when fixing to wooden battening. Make sure the battening is flat and level, packing out where necessary on uneven walls so that when applied the cladding does not develop curvature by following wall contours.

Gluing: only works when applied to an even, dry wall. The wall must be free of any greasy substances and dust. Only use neoprene glue. Ask your distributor for advice.

- In the case of damp and uneven walls we recommend the use of treated timbers for battening. Ensure that you leave sufficient ventilation behind the cladding by providing an air gap between the battening. Position battens at 40 to 60 centimetre intervals.
- Use end profiles to finish off the cladding.
- Using battens allows you to install cables for switches and plugs for power supply, phones...
- Do not apply the product around heat radiating objects. (i.e. radiators, cookers) Check the temperature around these objects. It must not exceed 60°C.

Tip: Cut the backs of panels to form internal or external corners as below:-



Decoclاد products are produced using a print process. In some cases this can produce minor colour variations. It is therefore important that contracts are completed using panels from the same batch and are visually matched prior to installation.

plaslyneTM
PLASTIC BUILDING PRODUCTS

Plaslyne, Unit D, Stafford Park 7,
Telford, TF3 3BQ.

Tel: 01952 292511 Fax: 01952 292025
Email: info@plaslyne.co.uk

Your Local Stockist